



FAILURE TO HEED THESE WARNINGS CAN RESULT IN PERMANENT INJURY,
PARALYSIS FROM A BROKEN NECK, ELECTROCUTION OR DROWNING.
THIS POOL IS NOT DESIGNED FOR DIVING OR JUMPING!
DANGEROUS INJURY CAN RESULT, SHALLOW WATER!

Your pool contains a large quantity of water, and is deep enough to present inherent dangers to life and health unless the following safety rules are strictly observed. First-time users run the highest risk of injury. Make sure everyone understands. To insure your pool is used safely you observe the following safety precautions:

The top rail of your pool is not a walkway and must not be used for jumping or diving. Do not permit jumping or diving into the pool from a deck or the top rail of the pool. Diving or jumping into the pool can result in serious injury.

Never permit the pool to be used unless it is attended by at least one person other than the bather. Someone should always be available to lend assistance in an emergency.

Never leave a child alone and unsupervised in or near the pool—not even for a second. There is no substitute for constant adult supervision.

Do not permit "rough-playin" in and around your pool. Surfaces can become slippery and hazardous when wet.

If the pool is used after dusk, adequate lighting must be provided. Illumination in the pool area must be sufficient to clearly judge pool depth and all features in and around the pool. For lighting recommendations, consult your local licensed electrical contractor.

Do not leave chairs or other furniture beside the pool that could be used by a child to climb up into the pool. Ladders must be removed whenever the pool is unattended. A fence with a lockable gate around the pool or yard is strongly recommended and may be required by law in some jurisdictions.

Never drink alcoholic beverages or use any intoxicants which could hinder your judgment and reflexes.

Your filter system will remove suspended particles from the water and the surface skimmer will remove insects, leaves and other debris from the water surface. Use the correct pool chemicals as directed to destroy harmful bacteria and prevent formation of algae. Remember, unsanitary water is a serious health hazard.

Do not walk on top ledges. They can be slippery and they are not a walkway.

The cover must have a tamperproof locking retainer cable that positions the cover around the pool wall and keeps it securely in place. Never allow anyone, especially small children on the cover. Asphyxiation or drowning could result. When purchasing any pool cover, please consult a swimming pool professional.

Never touch or attempt to service electrical equipment, including the filter when your body and/or the ground is wet. Electrocution or permanent injury due to high voltage (120V AC) could result. The pool should be bonded in accordance with Section 680-26 of the National Electrical Code. For further assistance contact your dealer or a local licensed electrician. Do not use pool during electrical or rain storms.

Keep a safety rope 1/4" by 50" with a flotation buoy with an outside diameter of 15". Have accessible in a prominent area by your pool. Keep a pole not less than 16 feet (4.88m) long with a blunt or hook end available at pool side in case of emergencies.

Do not place chlorine, chlorine tablets or sticks directly into skimmer, or winterize your pool with liquid chlorine. Damage to the skimmer, pool liner and filter will result. Failure to obey this instruction will void all component warranties. Always follow Chemical Manufacturer's instructions when storing, handling and dispensing pool chemicals.

Periodically check your pool and ladder components for damage and wear. Be sure all screws are in place. Replace all damaged or worn components and tighten all screws before you use the pool, deck or ladders. At first sign remove rust and touch up immediately.

Never modify the pool or accessories, or remove or drill holes in the pool, deck or ladder components unless instructed. Your pool wall is made of thin metal, there is an inherent cut hazard with metal so use gloves during installation. Always use Original Equipment Manufactured parts for your replacement parts.



Read and follow all safety instructions packaged with pool, ladder, deck or any other accessory. Additional pool safety publications can be obtained by contacting: The Association of Pool & Spa Professionals (www.apsp.org)



IMPORTANT NOTICE READ BEFORE INSTALLATION!

The safety stickers must be installed as per following instructions. Failure to properly install warning labels will void warranty. Failure to mount these safety labels may subject you to substantial liability in case of injury. These warning are not to be removed under any circumstances! If they become discolored or fall off please request replacements which will be sent at no charge.



T3669-80A

POOL ASSEMBLY AND INSTALLATION MANUAL

Monument Above Ground Delta Extruded Wall Oval Pools with 7" Frames



THIS MANUAL EXPLAINS THE CORRECT METHOD TO ASSEMBLE YOUR NEW SWIMMING POOL. READ THESE INSTRUCTIONS AND STUDY THE ILLUSTRATIONS. ALSO READ INSTRUCTIONS FOR ACCESSORIES SUCH AS FILTERS, LADDERS, ETC. PAY PARTICULAR ATTENTION TO THE CAUTIONS ON THE FOLLOWING PAGES.

THE MANUFACTURER IS NOT AFFILIATED WITH ANY PROFESSIONAL POOL INSTALLER; THEREFORE THE MANUFACTURER CANNOT ASSUME RESPONSIBILITY FOR ERRORS IN THE INSTALLATION OF YOUR POOL BY THE INSTALLER OR THE HOMEOWNER. IF YOU HAVE THIS POOL INSTALLED BY OTHERS, PLEASE SUPERVISE TO BE SURE YOUR POOL IS INSTALLED PROPERLY AND THAT ALL THE CAUTIONS LISTED THROUGHOUT THIS MANUAL HAVE BEEN FOLLOWED. PAST EXPERIENCE OR SHORT CUTS MAY NOT BE COMPATIBLE WITH OUR POOLS, FOLLOW THE INSTALLATION MANUAL.

THE MANUFACTURER RESERVES THE RIGHT TO CHANGE OR IMPROVE ANY ITEM WITHOUT INCURRING ANY OBLIGATION TO MAKE ANY CHANGES OR IMPROVEMENTS ON ITEMS PREVIOUSLY SOLD AND TO DISCONTINUE MODELS OR CHANGE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE.

THIS PRODUCT IS SOLD WITH A "LIMITED WARRANTY". THE TERMS AND CONDITIONS ARE SET FORTH IN THE "LIMITED WARRANTY" CERTIFICATE PACKED WITH EACH POOL. COPIES OF THE "LIMITED WARRANTY" ARE ALSO AVAILABLE UPON WRITTEN REQUEST.

YOUR LOCAL BUILDING CODE MAY REQUIRE OBTAINING A BUILDING PERMIT AND MAY HAVE REQUIREMENTS ON SECTIONS, BARRIERS, ETC. ANY HOME BUILT OR PREFABRICATED DECKS SHOULD CONFORM TO THE LOCAL CODES, AND BOCA NATIONAL BUILDING CODE. THE ELECTRICAL CODE MAY REQUIRE A PERMIT AND INSPECTION, AND USE OF GFCI DEVICES OR OTHER CONDITIONS. THE ELECTRICAL INSTALLATION MUST ALSO CONFORM TO ARTICLE 680 OF THE NATIONAL ELECTRIC CODE. INSTALL THE FILTER AND PUMP IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. **ARTICLE 680 STATES THAT YOU MUST BOND THE SWIMMING POOL PUMP TO THE SWIMMING POOL. THIS CAN BE DONE BY ATTACHING A #8 COPPER WIRE FROM THE BONDING LUG ON THE PUMP TO AN UNPAINTED METAL SURFACE ON THE POOL WALL OR BOTTOM CLIP.**

THE INSTALLATION OF AN ABOVE GROUND SWIMMING POOL WILL USUALLY REQUIRE THREE PEOPLE TO HELP ASSEMBLE IT.

DANGER: THIS POOL, EVEN IF SUPPLIED WITH A DEEP AREA, CONFORMS TO THE NATIONAL SWIMMING POOL INSTITUTE STANDARDS FOR A TYPE O, NON-DIVING POOL. DIVING, SLIDING OR JUMPING INTO THE POOL MAY CAUSE PARALYSIS, DEATH OR PERMANENT INJURY.

DANGER

1. DO NOT DIVE OR JUMP INTO YOUR POOL. DO NOT USE A POOL SLIDE ON THIS POOL. YOUR POOL CONTAINS SHALLOW WATER AND IS NOT DESIGNED FOR HEAD FIRST ENTRY (DIVING OR SLIDING) OR JUMPING. DIVING, SLIDING OR JUMPING CAN RESULT IN A BROKEN NECK IF YOU STRIKE THE POOL. THIS CAN RESULT IN PARALYSIS, DEATH OR PERMANENT INJURY. INFORM ALL FAMILY AND GUESTS OF THESE RULES AND POINT OUT WARNING LABELS.
2. IT IS NECESSARY TO MAINTAIN A 4' HIGH BARRIER TO REDUCE THE CHANCE OF A CHILD ACCESSING AN UNSUPERVISED POOL. THE BARRIER MAY BE A FENCE, WALL OR COMBINATION THEREOF WHICH COMPLETELY SURROUNDS THE POOL. BARRIERS MUST COMPLY WITH THE LOCAL BUILDING CODE, BOCA NATIONAL BUILDING CODE OR THE "CONSUMER PRODUCT SAFETY COMMISSION" BARRIER STATEMENT. THE FOUR FOOT HIGH POOL WALLS USUALLY PROVIDE THIS BARRIER, HOWEVER IF THE POOL IS LESS THAN 48" ABOVE GRADE, OR HAS BUTTRESSES (OVAL POOLS), YOU MAY NEED ADDITIONAL FENCING TO PROVIDE THIS BARRIER. CONSULT WITH YOUR BUILDING OFFICIAL FOR SPECIFIC REQUIREMENTS. FENCING OPTIONS ARE AVAILABLE FOR YOUR POOL PLEASE CONTACT YOUR POOL DEALER.
3. YOU MUST MAINTAIN A 5' WIDE "CLEAR ZONE" AROUND THE POOL AND DECK OR FENCING. DO NOT ALLOW TOYS, CHAIRS, TABLES OR SIMILAR CLIMBABLE OBJECTS IN THIS "CLEAR ZONE", ENABLING CHILDREN TO CLIMB AND GAIN ACCESS TO THE POOL. THE FILTER EQUIPMENT MUST ALSO BE LOCATED OUTSIDE OF THE "CLEAR ZONE".
4. YOU MUST RAISE AND LATCH, OR SECURE YOUR POOL LADDER OR POOL ENTRANCE WHEN THE POOL IS NOT IN USE.

Adherence to the above items will reduce the frequency of preventable child drownings in swimming pools.

WARNING

1. YOUR POOL IS SUPPLIED WITH WARNING SIGNS WHICH MUST BE AFFIXED TO THE POOL AS SPECIFIED. IF YOU BUILD A DECK, THE TWO AREA SIGNS MUST BE AFFIXED TO THE DECK AT THE POINT OF ENTRY, VISIBLE TO PEOPLE ENTERING THE POOL AREA. FAILURE TO INSTALL OR IMPROPER LOCATION OF SAFETY INFORMATION WILL SUBJECT YOU AND/OR THE INSTALLER TO LIABILITY ARISING FROM INJURY CLAIMS.
 - A. NO DIVING COPING: (TWO SUPPLIED) THESE ARE TO BE INSTALLED ACROSS THE POOL FROM THE POINT OF ENTRY, AND HAVE ONE SECTION OF REGULAR COPING BETWEEN THEM.
 - B. COPING WITH INTERNATIONAL LOGO: THIS ONE COPING IS TO BE INSTALLED AT THE POINT OF ENTRY, EITHER ADJACENT TO THE "A" LADDER, UNDER THE IN POOL LADDER, OR IN THE CENTER OF A DECK.
 - C. DANGER AREA SIGN WITH LOGO: (T1440) THIS SIGN MUST BE INSTALLED AT THE POINT OF ENTRY, FACING ALL USERS AS THEY ENTER THE POOL. IF YOUR POOL HAS A FENCE, THE SIGN IS TO BE FASTENED TO THE FENCE, ADJACENT TO THE LADDER OR ENTRANCE. IF YOUR POOL DOES NOT HAVE A DECK OR FENCE, ATTACH THE SIGN TO THE EDGE OF THE COPING ADJACENT TO THE LADDER. THE SIGN MUST BE VISIBLE TO ALL USERS AS THEY ENTER THE POOL AREA.
 - D. CAUTION - SAFETY RULES SIGN: (1445) THIS SIGN MUST BE ATTACHED TO THE FENCE DIRECTLY BELOW THE DANGER SIGN OR IF YOU DO NOT HAVE POOL FENCING, ON THE COPING NEXT TO THE DANGER SIGN.

If any signs are missing or damaged contact the customer service department for replacements.

CAUTION

1. DECK SURFACES MAY BECOME SLIPPERY WHEN WET. DO NOT RUN OR DIVE INTO THE POOL FROM THE DECK. NOTE: SUNTAN LOTIONS AND OILS MAY CAUSE POOL COMPONENTS TO BECOME SLIPPERY.
2. **EACH MONTH CHECK THE POOL WALL FOR DETERIORATION OR LEAKAGE, ESPECIALLY AT THE SKIMMER AND RETURN FITTINGS. THE SKIMMER AND RETURN GASKETS SHOULD BE REPLACED EACH SPRING TO PREVENT LEAKAGE. DETERIORATION CAN WEAKEN THE POOL WALL WHICH COULD RUPTURE, RELEASING THE POOL WATER WHICH COULD CAUSE BODILY HARM AND PROPERTY DAMAGE.**
3. FOR NIGHT TIME USE, YOU MUST PROVIDE LIGHTING TO ILLUMINATE THE POOL, SAFETY SIGNS, AND DECK SURFACES. LIGHTING MUST COMPLY WITH ARTICLE 680 OF THE NATIONAL ELECTRIC CODE. IT IS IMPORTANT THAT USERS BE ABLE TO SEE THE SHALLOW DEPTH OF THE POOL AT ALL TIMES.
4. THE FOLLOWING BASIC LIFESAVING EQUIPMENT MUST BE ON HAND AT ALL TIMES:
 - A. A LIGHT BUT STRONG POLE (SHEPHERD'S CROOK) NOT LESS THAN 12' LONG.
 - B. A 1/4" THROWING ROPE, AS LONG AS 1 1/2 TIMES THE MAXIMUM WIDTH OF THE POOL, WHICH IS ATTACHED TO A COAST GUARD APPROVED FLOTATION DEVICE SUCH AS A RING BUOY.
 - C. A TELEPHONE SHOULD BE NEARBY WITH A LIST OF EMERGENCY TELEPHONE NUMBERS, SUCH AS POLICE, & AMBULANCE

5. ADDITIONAL POOL SAFETY RELATED PUBLICATIONS ARE AVAILABLE FROM THE FOLLOWING:
- | | |
|---|------------------------------------|
| ASSOCIATION OF POOL & SPA PROFESSIONALS | CONSUMER PRODUCT SAFETY COMMISSION |
| 2111 EISENHOWER AVE WASHINGTON, | DC 20207 |
| ALEXANDRIA, VA 22314-4695 | |

IMPORTANT INSTALLATION ITEMS

1. LEVELNESS; POOL MUST BE LEVEL WITHIN 3/4". UNLEVEL POOLS PLACE EXTREME FORCES ON THE POOL WHICH MAY DEFORM.
2. WALL CLOSURE; THE POOL WALL MUST BE FASTENED TOGETHER PROPERLY WITH BOTH BARS AND FASTENERS IN ALL HOLES. OMITTED BARS OR FASTENERS CAN CAUSE THE WALL TO RUPTURE, DESTROYING THE POOL AND INJURING PEOPLE.
3. SAND COVE; THIS SUPPORTS THE LINER AND MUST BE PACKED SOLID. IF IT COMPRESSES, SHIFTS OR ERODES THE LINER MAY RUPTURE, RELEASING ALL THE WATER AND DESTROYING THE POOL AND INJURING PEOPLE.
4. THESE POOLS ARE NOT DESIGNED TO BE BURIED. THE GROUND FORCES CAN COLLAPSE THE POOL INWARD. FOR SEMI IN-GROUND INSTALLATIONS, CONTACT YOUR DEALER FOR DOCUMENT T3964.
5. DO NOT LOCATE YOUR POOL NEAR STRUCTURES SUCH AS A HOUSE, GARAGE, ETC. AS PEOPLE COULD DIVE OR JUMP INTO THE POOL RESULTING IN DEATH OR PERMANENT INJURY.
6. ALTHOUGH THERE ARE RELATIVELY FEW PARTS IN YOUR POOL, NONE MAY BE OMITTED IN ASSEMBLY. EACH PART SUPPLIED IS AN IMPORTANT PART AND IF OMITTED, MAY CAUSE POOL FAILURE. CHECK ALL PARTS AGAINST THE PARTS LIST.

WARNING: Do not exceed the following torque values for the noted fasteners:

1/4" - 20 S. S. Fasteners	75 (in. lbs.)
3/8" - 16 S. S. Fasteners	236 (in. lbs.)
3/8" - 16 Aluminum Fasteners	143 (in. lbs.)

TOOLS AND MATERIALS

PHILLIPS SCREWDRIVER #2	HAND TROWEL	EXTENSION CORD	HAMMER	RAKE
SLOTTED SCREWDRIVER #2	GARDEN HOSE & NOZZLE	STRING LINE	PLIERS	
SOCKET WRENCH & SOCKETS	50' TAPE MEASURE	HAND TAMPER	TO RQUE WRENCH	
TRANSIT OR FARM LEVEL	ELECTRIC DRILL & BITS	GARDEN SHOVEL	WRENCHES	
1 LONG STRAIGHT 2 X 4 14' LONG	1 ROLL DUCT OR FABRIC TAPE		WHEELBARROW	
25 WOOD STAKES	1 CAN WHITE SPRAY PAINT		PLASTIC GROUND COVER	

SAND AND BLOCK CHART

P	OOL SIZE	SAND		2" x 8" x 16"	4" x 8" x 16"
		TONS	YARDS	PATIO BLOCKS	CAP BLOCKS
	12'x18'	2	1 1/4	12	2
	12'x21'	2 1/2	1 3/4	12	4
	12'x24'	3	2	8	6
	15'x24'	3 1/2	2 1/4	12	4
	15'x30'	4	2 3/4	12	8
	18'x33'	5 1/4	3 1/2	14	8

NOTE: Sand must be masons or bar sand and be free of foreign objects

SELECTING THE POOL SITE

1. Check your local building codes and acquire proper building permits. For poor soil conditions consult a professional engineer.
2. The pool site must be absolutely level and solid. The area must be free from stones and roots.
3. To protect the pool from chemicals and foreign matter in the soil, use a ground cover under the sand base. Do not install your pool on asphalt, tarpaper, grass, wood, gravel, clay, concrete, or treated soils.
4. Position your pool away from trees, overhead wires, structures such as a house or garage or septic fields.

GROUND PREPARATION

Your pool must be installed on a solid level surface, perform the soil test as illustrated below. Position stakes as shown on figure 1 and use a farm level or transit to level the area as shown. Remove all grass, roots and stones. Start at the lowest spot, remove all high spots, do not fill in low spots. The area must be absolutely level. Lines 1 through 6 of the following table refers to Figure 1.

OVAl POOLS	LINE "1"	LINE "2"	LINE "3"	LINE "4"	LINE "5"	LINE "6"
12' X 18'	7' - 3"	6' - 3"	7' - 0"	6' - 0"	17' - 7"	2' - 8"
12' X 21'	7' - 3"	6' - 3"	10' - 0"	9' - 0"	17' - 7"	2' - 8"
12' X 24'	7' - 6"	6' - 0"	13' - 0"	12' - 0"	17' - 7"	2' - 8"
15' X 24'	8' - 6"	7' - 6"	10' - 0"	9' - 0"	20' - 1"	2' - 8"
15' X 30'	8' - 6"	7' - 6"	16' - 0"	15' - 0"	20' - 1"	2' - 8"
18' X 33'	10' - 0"	9' - 0"	16' - 0"	15' - 0"	23' - 1"	2' - 8"

Soil Test

Dig a hole in the pool area one foot square and one foot deep and fill with water. If at the end of one hour the water has not completely soaked in, the following steps must be taken:

1. Round Ends: 3 patio blocks must be placed under each bottom clip as shown in figure 8.
2. Oval Midsections: A concrete footing must be placed under the end of each Delta upright along both sides and down the length of the bottom rail. Consult a local professional engineer to determine the size and type of concrete footing to be installed. The design load per upright is 4,000 lbs.

Step 1: Parts Identification:
See figures in bill of material packet. Check for installation addendums.

Step 2: Ground Layout:
Layout the area to be leveled as shown in Figure 1. Measure and mark with spray paint the lines on the ground for your size pool. Dig 2" deep to remove all grass from within the pool area, clear all debris and level this entire area using a transit. Be certain the area is smooth and all grass, stones, roots and any other foreign objects have been removed. **Do not build up or fill low areas. Remove all high spots.**


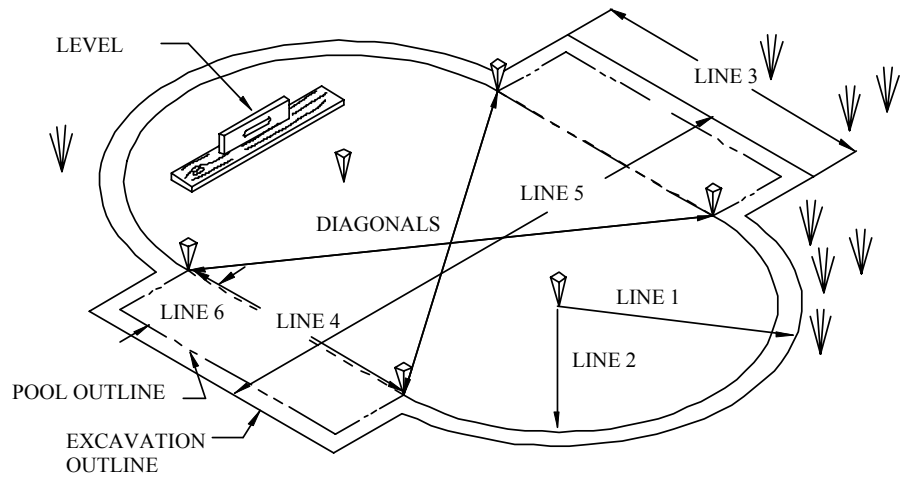


FIGURE 1

L00003B




CAUTION: For Oval Hopper Pools: If this pool is being installed with a deep end refer to instructions packed with the liner.

NOTE: FASTEN TOGETHER ONLY THE CENTER INDICATED BY CIRCLES

FIGURE 2

L00034C

TIE STRAP LAYOUT

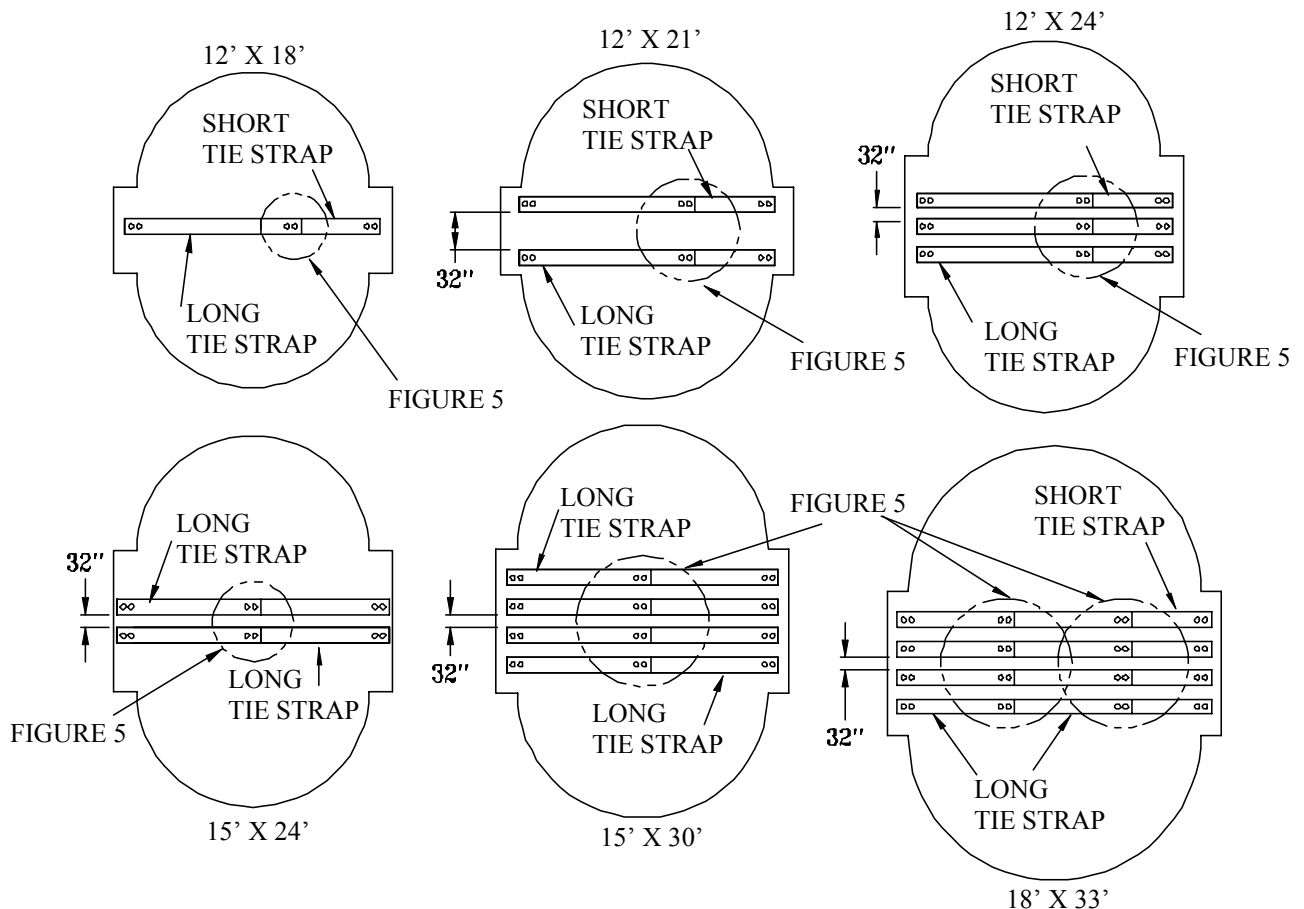

Step 3: Attach the left and right sides of the delta uprights to the bottom beams as shown in Figure 3. Slide the tee clip through the slot in the bottom rail and attach to the **top of the bottom beam** as shown in Figure 3A. Bolt the tie straps to the adapter plate then attach the adapter plate to the bottom beam as shown in Figure 3. See Figure 2 for correct tie strap placement. Slide the delta interlock over the left and right delta upright pieces as shown. Slide the vinyl cap onto the ends of the bottom beams as shown in Figure 3.

FIGURE 3

A00001A



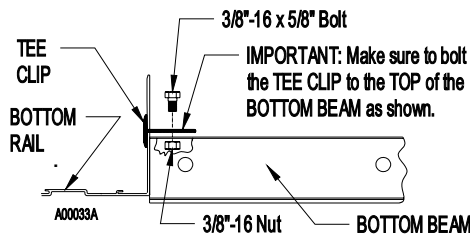


FIGURE 3A

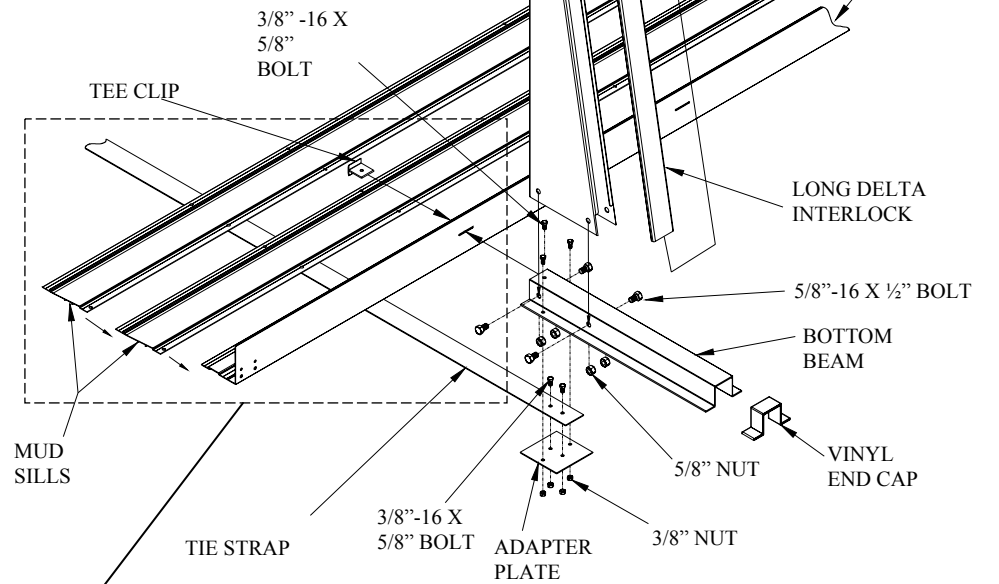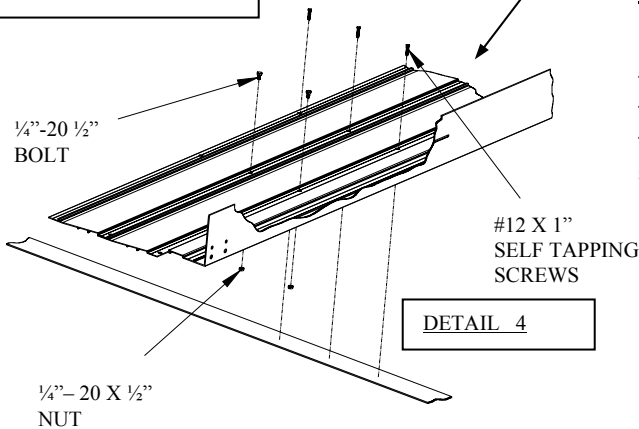

Step 4: Interlock the mud sills into the bottom rail as shown in Figure 3. Bolt the Mud sills to the bottom rail as shown. Attach the bottom rail/mud sill assembly to the tie straps with #12 X 1" screws as shown in Detail 4.

FIGURE 4

L00015C


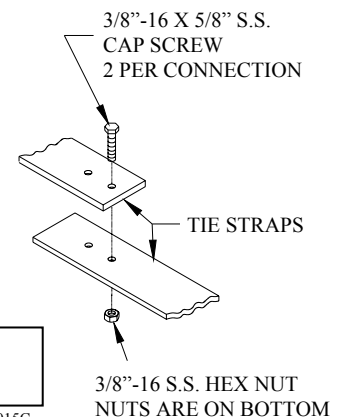


FIGURE 5

A00029

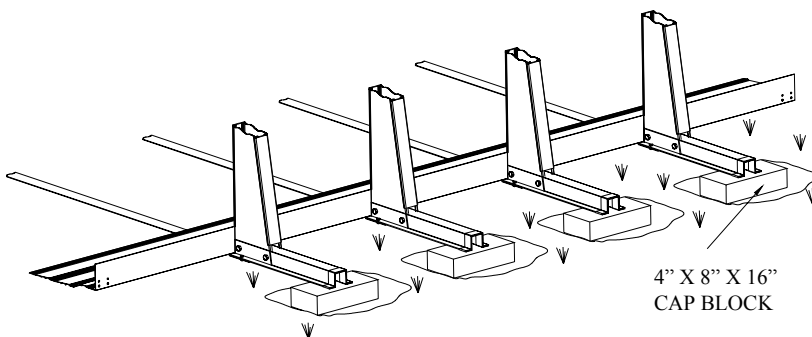

If your pool is getting a walk deck or pool fence, attach the appropriate post holders or walk deck supports at this time. See manual supplied with the walk deck or pool fence.


Step 5: Bolt together the tie straps across the span of the pool as shown in Figure 4. Once both sides of your mid-section is assembled, verify that your pool is squared properly by measuring the diagonal distance from the two opposite corners of the bottom rail.

Step 6: Dig down and place a 4" X 8" X 16" cap block at the end of each bottom beam as shown in Figure 5. Level the bottom rail with a transit and adjust to be certain it is level

Step 7: Attach the transition uprights to the four corners of the bottom rail as shown in Figure 6.

Step 7A: Assemble the adapter to the mud-sill as shown in Figure 6A.

Step 8: Attach the delta stiffeners to the stiffener bracket as shown in Figure 7. You will need to slide the short delta interlocks onto the left and right deltas to be just above the stiffener brackets.

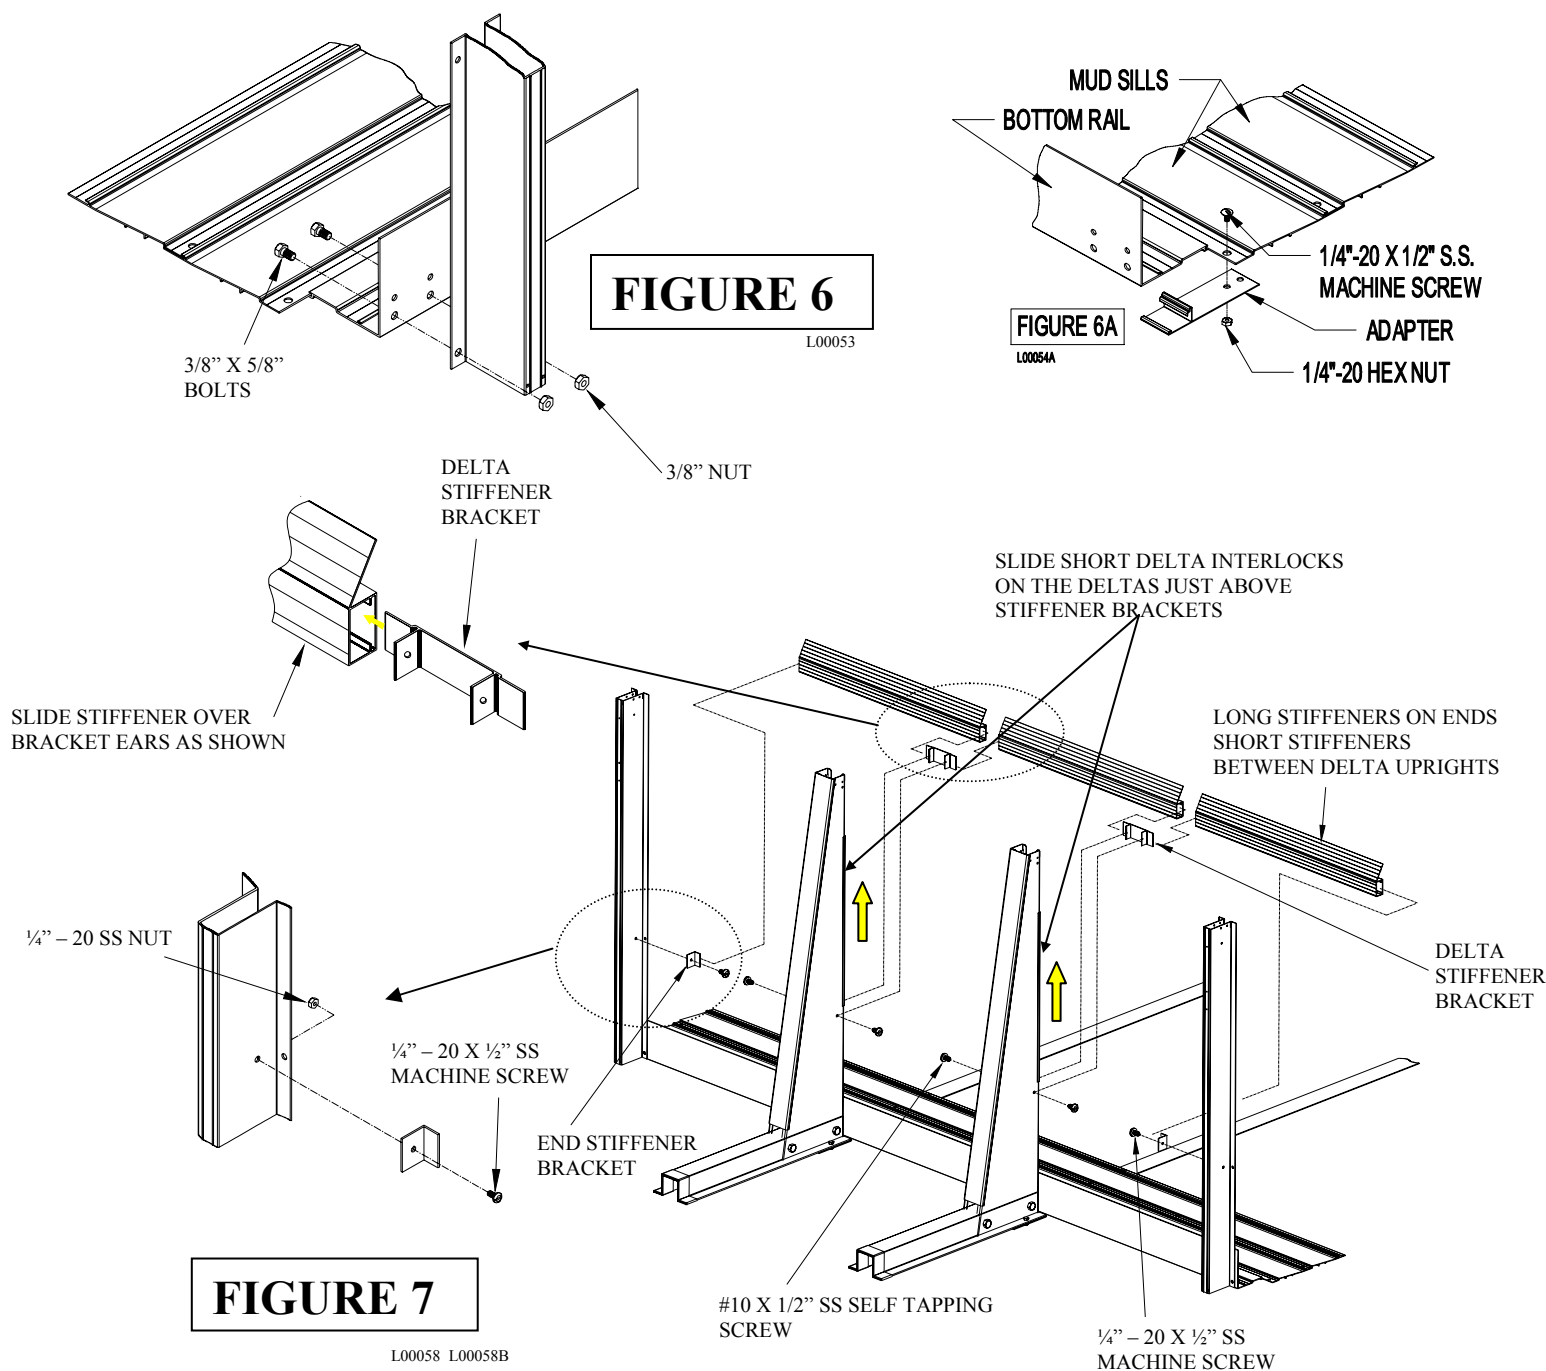

Step 9: See Figure 1. Mark line "2" as shown in the table on page 3. Create a circle on line "2" by sliding the wall channels into the bottom clips, See Figure 8. Place a 2" thick patio block under each bottom clip. If the bottom wall channel is on soft ground, place additional blocks under the wall channel where needed. Dig 2" down for each block. *The top on the top block must be at grade level.* Place a stake adjacent to each wall channel to keep the half circle in position during installation. Repeat for other end.

HINT: It may be helpful to crimp the bottom clip over the wall channel to keep it from coming loose.

Step 10: See Figure 9 and 10. Place the required amount of sand inside the pool area. Place the 3' angles into the slot in the bottom rail as shown in Detail 8A. Insert short leg down. Starting at the bottom clip on the downwind side of the pool, attach the upright slat to the bottom clip. Be sure the machine screw is to the inside of the pool. Working in a counter-clockwise direction, slide a wall slat onto the upright slat. The slat should be held about 30 degrees from the upright slat while sliding together. Then when seated, rotate the wall slat against the wall angle. The skimmer slat should be located between the first two round side upright slats as you work around the pool. Do not locate the skimmer under the patio. The return slat must be located within 15 panels to the left of the skimmer as you face the pool.

Be careful not to let the wall fall over during assembly. The walls must remain plumb. If the wall falls over, disassemble fallen section and start again.

Use figure 11 to determine the number of slats needed on the straight side of an oval pool. The count is from upright slat to upright slat.


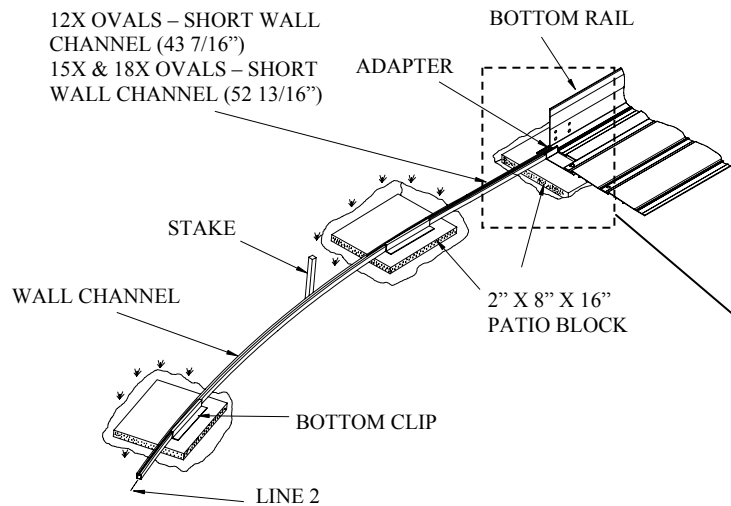


FIGURE 8

L00008E

STACKING
PATTERN FOR
POOR SOIL

3' ANGLE
SHORT LEG DOWN



BOTTOM
RAIL

DETAIL 8A

A00032

CONSTRUCTION NUT. THIS NUT MUST BE REMOVED AT THE BEGINNING OF THE FILLING OF THE POOL TO ALLOW FOR PROPER EXPANSION.

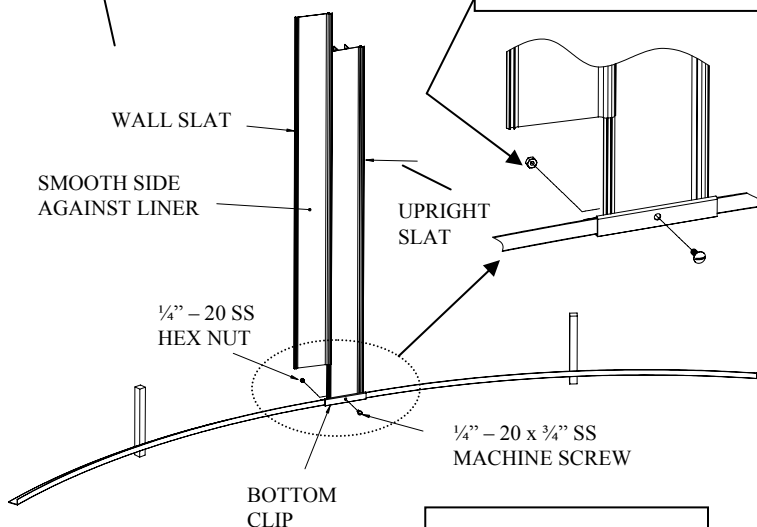


FIGURE 9

W00037

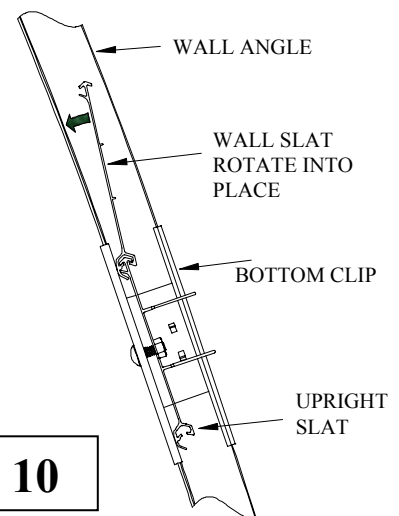
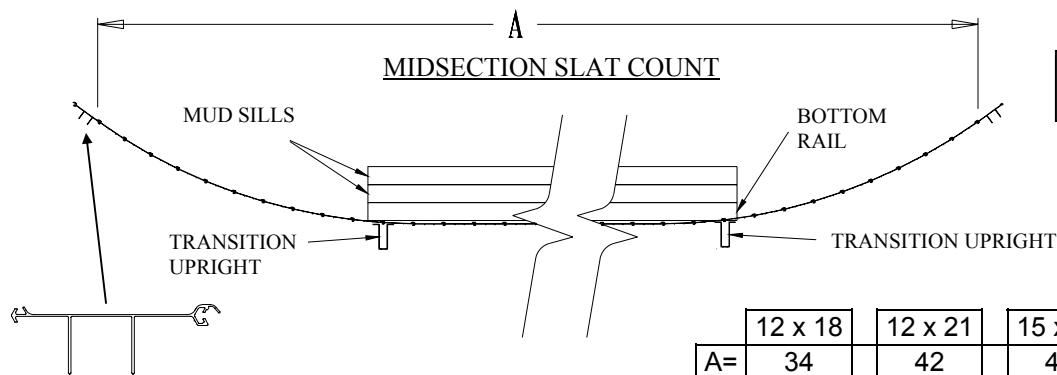


FIGURE 10

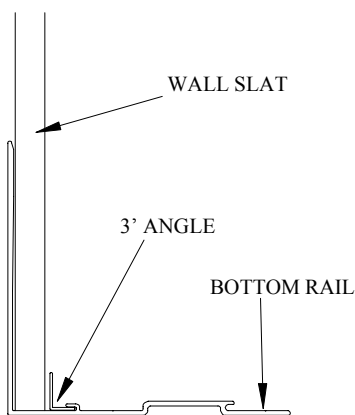
W00036

**FIGURE 11**

W00049


Upright Slat

On the round ends there are 11 slats between the upright slats. Except for the 12x18 & 12x21 which have 9 slats between the upright slats.

**FIGURE 12**

W00038

NOTE: THE SKIMMER THROAT GASKET MUST SANDWICH THE WALL. I.E. ONE FLAP OF THE GASKET MUST BE ON THE INSIDE OF THE WALL AND THE OTHER ON THE OUTSIDE.

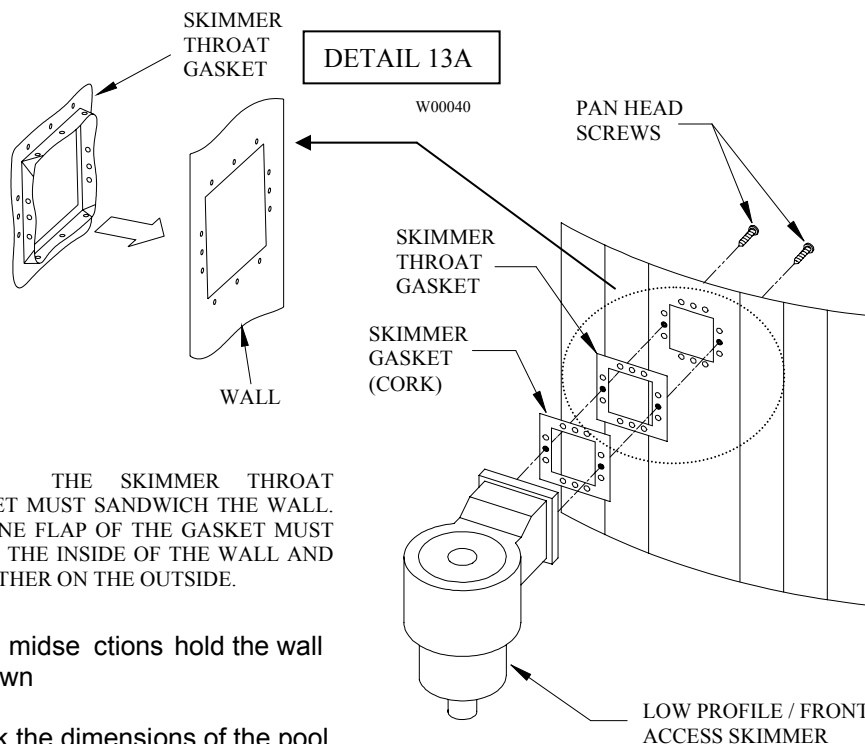**FIGURE 13**

W00039

Step 11: See Figure 12. On the oval midsections hold the wall slats in place with the 3° angles as shown

After the pool wall is assembled, check the dimensions of the pool to insure that it has not shifted during assembly.

Step 12: See Figure 13 and Detail 13a. Install the skimmer throat gasket to each side of the pool wall and attach the skimmer to the wall as shown using hardware provided with the skimmer. Mount the skimmer at the center with only two (2) pan head screws at this point. Refer to skimmer instruction sheet.

Step 13: See Figures 14. Place the bead receiver on the wall with the ends centered over the uprights. Tape the joints of the bead receiver using fabric tape to protect the liner.

Step 14: Loosen the nuts from the bottom clip / upright slat attachment. If you are installing a walk deck on this pool. Do Not completely remove the nut from the bolt. You will need this bolt to attach the walk deck posts. This allows the wall to expand to its proper shape when filling the pool. Spread the sand across the entire bottom of the pool. Moisten and tamp the sand to provide a solid base. The sand base must be 2" deep after tamping. The sand should be moistened and troweled to a smooth finish. Create a 6" radius cove along the wall as shown in Figure 15. This cove must also be tamped solid to prevent shifting. Clean the inside of the wall prior to installing liner.


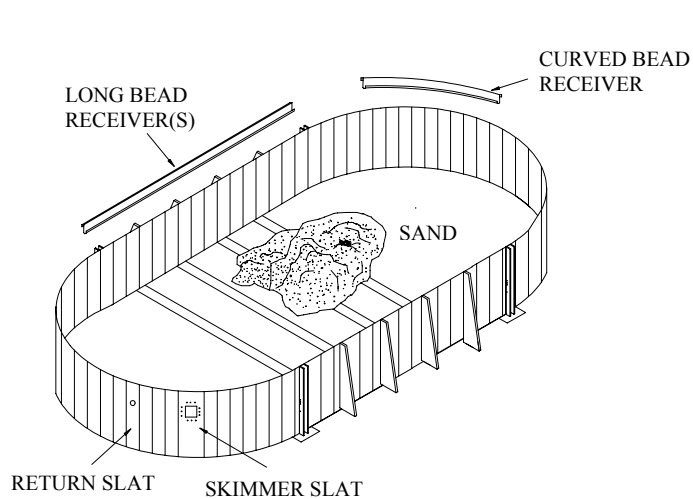


FIGURE 14

W00041

NOTE: TAPE A 3' WIDE PIECE OF PLASTIC TO THE BASE OF THE POOL WALL BEFORE SPREADING THE SAND TO HELP PREVENT FUTURE WASHOUT OF THE SAND UNDER THE POOL WALL.

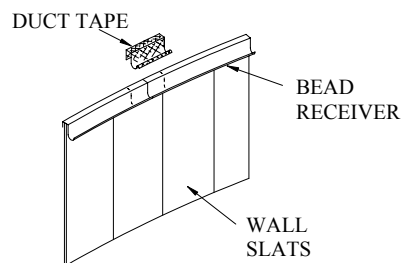

WARNING: Failure to use the sand or sand equivalent and shape it as specified will void all warranties on the pool and liner.

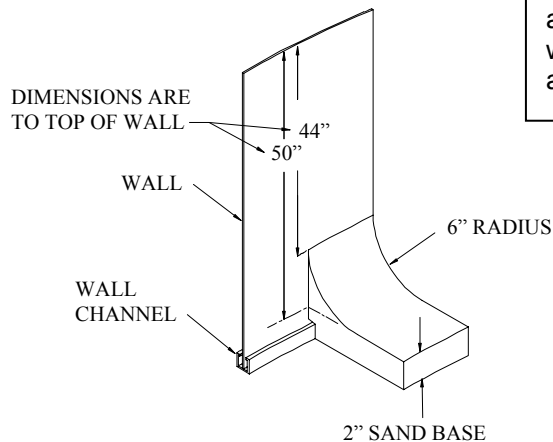


FIGURE 15

W00026B

Step 15: See Figures 16A, 16B and 17. Install captive nuts on the top clips. Mount the top clips on the transitional uprights and round upright slats.

Note: When properly installed, the direction of the hole pattern on this clip should form an arrow facing out of the pool.

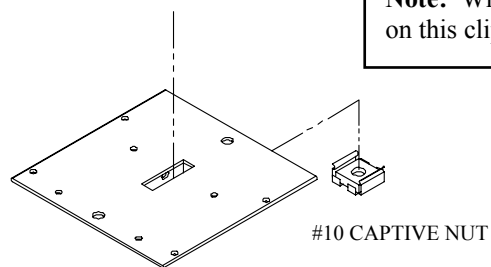


FIGURE 16A

L00036B

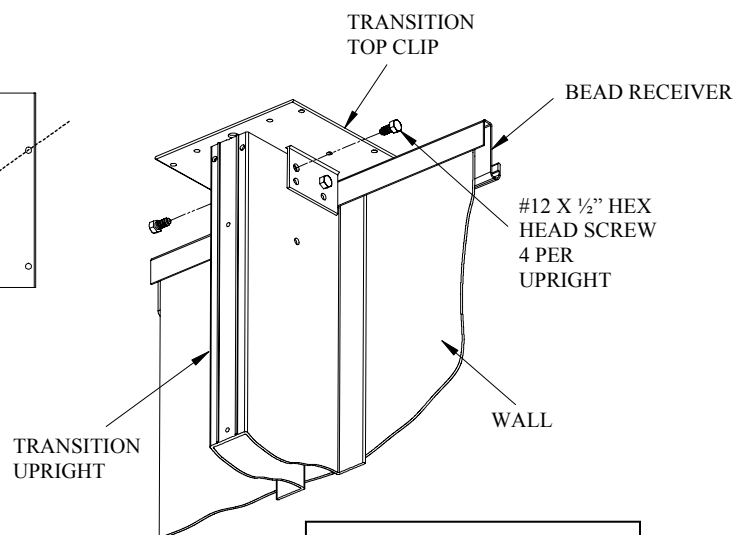
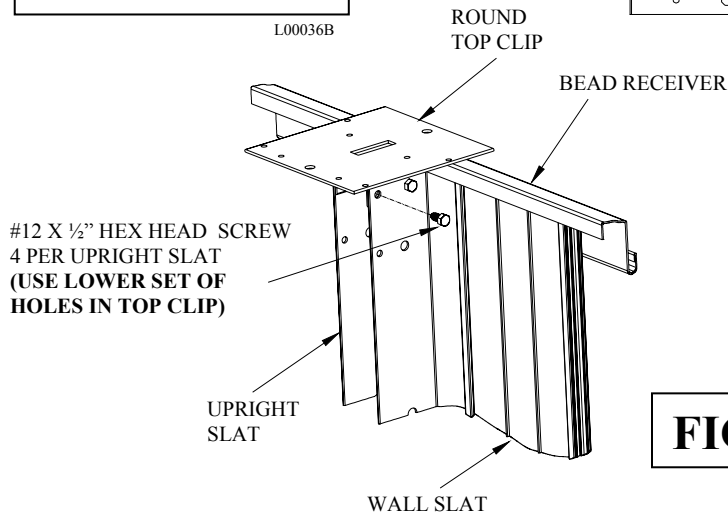



FIGURE 16B

A00017A

FIGURE 17

A00031

Step 16: See Figure 18. Remove the liner from the carton and unfold into the pool. Be careful not to drag, abrade or snag the liner. Spread the liner out over the entire bottom of the pool. The liner bottom should be centered in the pool using the seam at the perimeter of the bottom as a guide. Locate the triangle shaped tabs on the underside of the liner. These tabs should be lined up with the four transition uprights on the floor of the pool. Raise the liner sidewall and place the bead into the bead receiver. Bead must be fully seated in the receiver to prevent it from coming out later when filling. Check frequently while filling pool with water.

NOTE: If the liner is exposed to the sun for a long time, it will stretch and cause wrinkles. This can be avoided by waiting until dusk or by spraying cold water on the liner during installation.

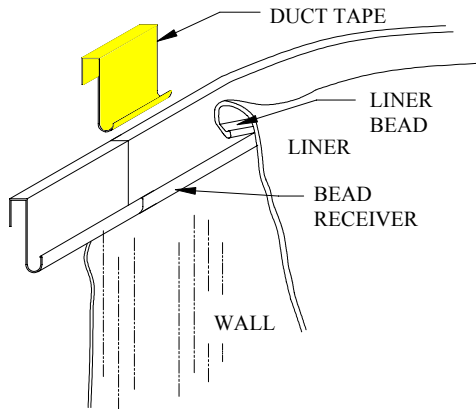


FIGURE 18

W00023

Step 17: Smooth all the wrinkles out on the bottom of the liner. To remove wrinkles, always pull the liner firmly but gently. No sharp tugs! Be certain liner is centered. Time spent removing wrinkles and aligning the liner will give you a neater looking and easily maintained pool.

Step 18: Begin to fill the pool with water. Use a slow stream of water and fill approximately 1 1/2" deep. Be certain that the blocks under the bottom beams have remained level and that the bottom beams are seated firmly on those blocks. Make sure the fit of the liner is correct. Smooth out any wrinkles in the pool bottom. Remove the construction nuts as previously shown in figure 9. **If installing a deck, do not fill more than 12" until the deck is installed.**

Step 19: Fill the pool with 4" to 6" of water. Measure the distance from the bead receiver to the water surface at several points around the pool to be certain that the pool is still level.



WARNING: The pool must not be more than 3/4" out of level. If the pool is not level, drain the water and level the structure. Any non-compliance with this requirement will void all warranties.

Step 20: See Figure 19, 20, 21 and 22. Locate the safety warning copings as described and as shown at the back of this manual. Attach all coping as shown.

Step 21: See Figure 23A and 23B. Assemble the coping covers as shown based on the type of pool you are installing.

FIGURE 19

CO00021A

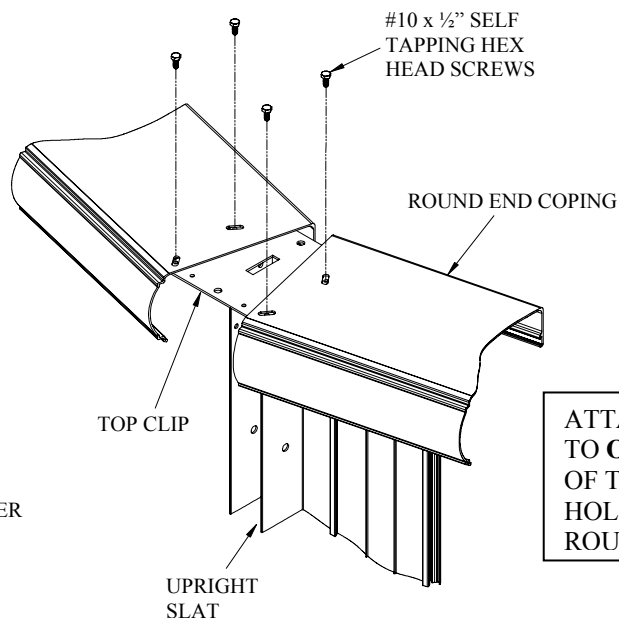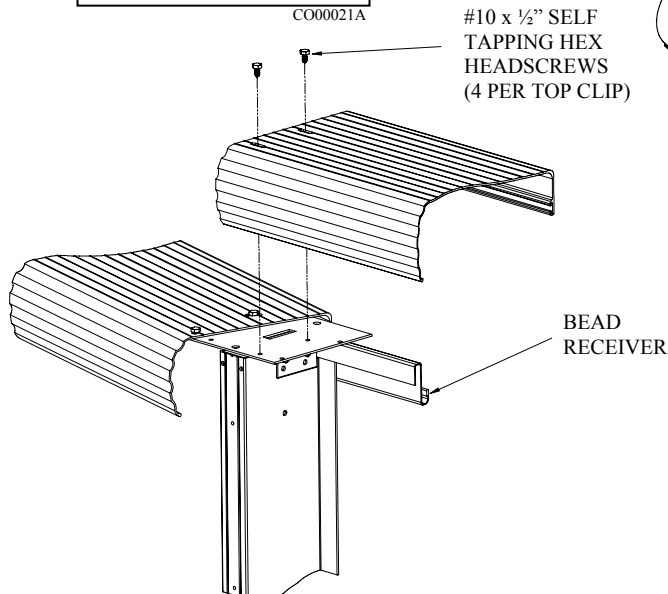

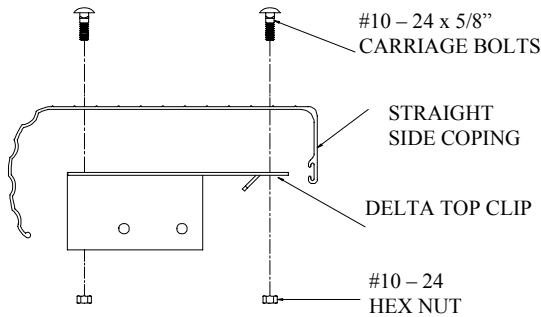
ATTACH COPING TO OUTER SET OF TOP CLIP HOLES ON THE ROUND ENDS

FIGURE 20

W00053


FIGURE 22

CO00022

**FIGURE 21**

C000012B

Note: Attach the midsection coping to the delta top clips first, then attach the coping and top clips to the delta uprights as a complete assembly.

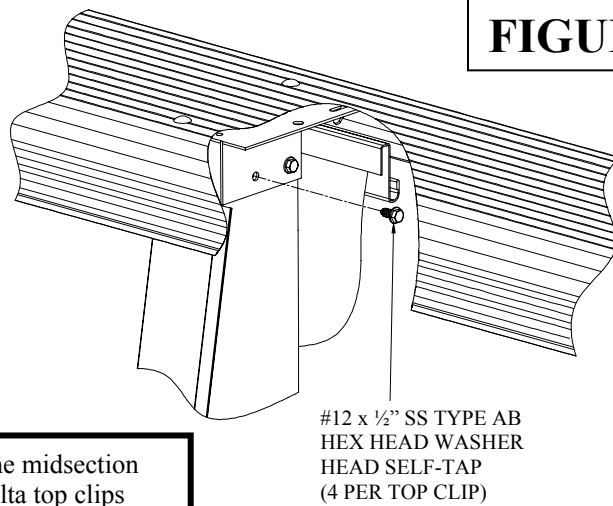


Step 22: Fill the pool until the water level is 3 inches below the return hole.

Step 23: Follow the instructions for the filtration system, skimmer and return that are supplied with the filter. See Figure 24 for additional assistance.


DANGER: When a filter or any other electrical device is added to this pool, it is the responsibility of the purchaser to take all necessary precautions as set forth in article 680 of the National Electrical Code and local electrical codes. Failure to comply with this requirement may result in a dangerous or hazardous electrical condition which may cause bodily injury or death.

Step 24: Attach the remaining safety warning signs as described and shown in Figure 25. If installing a fence or deck refer to those manuals for proper placement of safety information.

Step 25: Fill the pool up to the center of the skimmer, make sure that all fasteners are tightened properly and your pool is correctly assembled. Upon completion of the pool it is important to backfill the pool wall to prevent the sand from washing out from underneath and water from accumulating around the pool which can cause settling or deterioration. Backfill should be sand or clean well draining soil. Do not use mulch or materials which retain moisture, or limestone or materials which are corrosive. The backfill should be three to four inches up the wall, be sure to cover the bottom beams, and slope away to provide runoff. Please read the "Sensible Way to Enjoy Your Pool" booklet and enjoy years of swimming and relaxation.

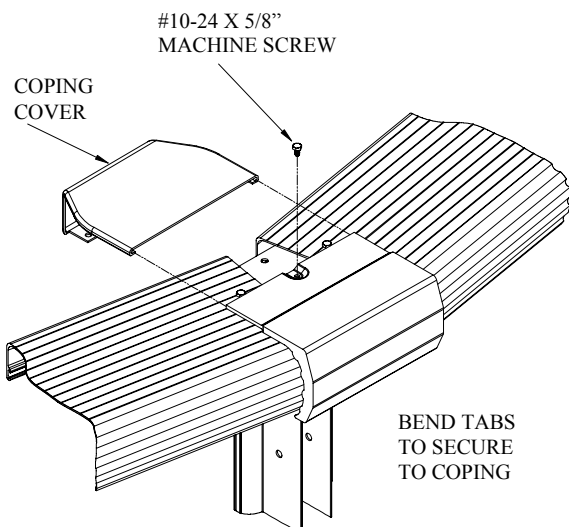**FIGURE 23A**

A00028A

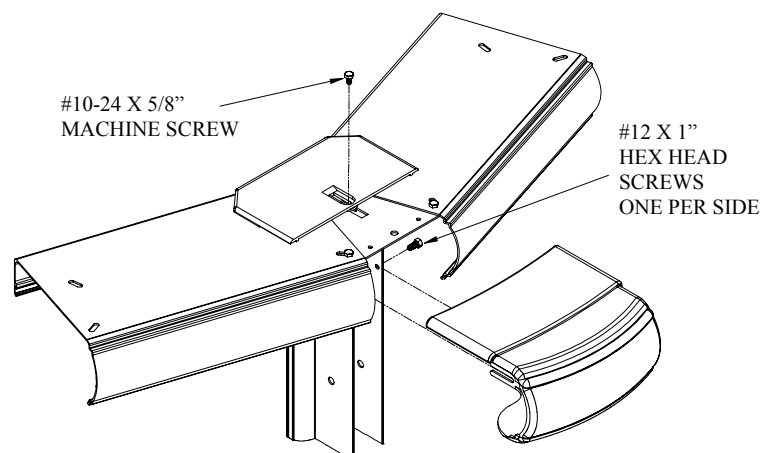**FIGURE 23B**

W00028D


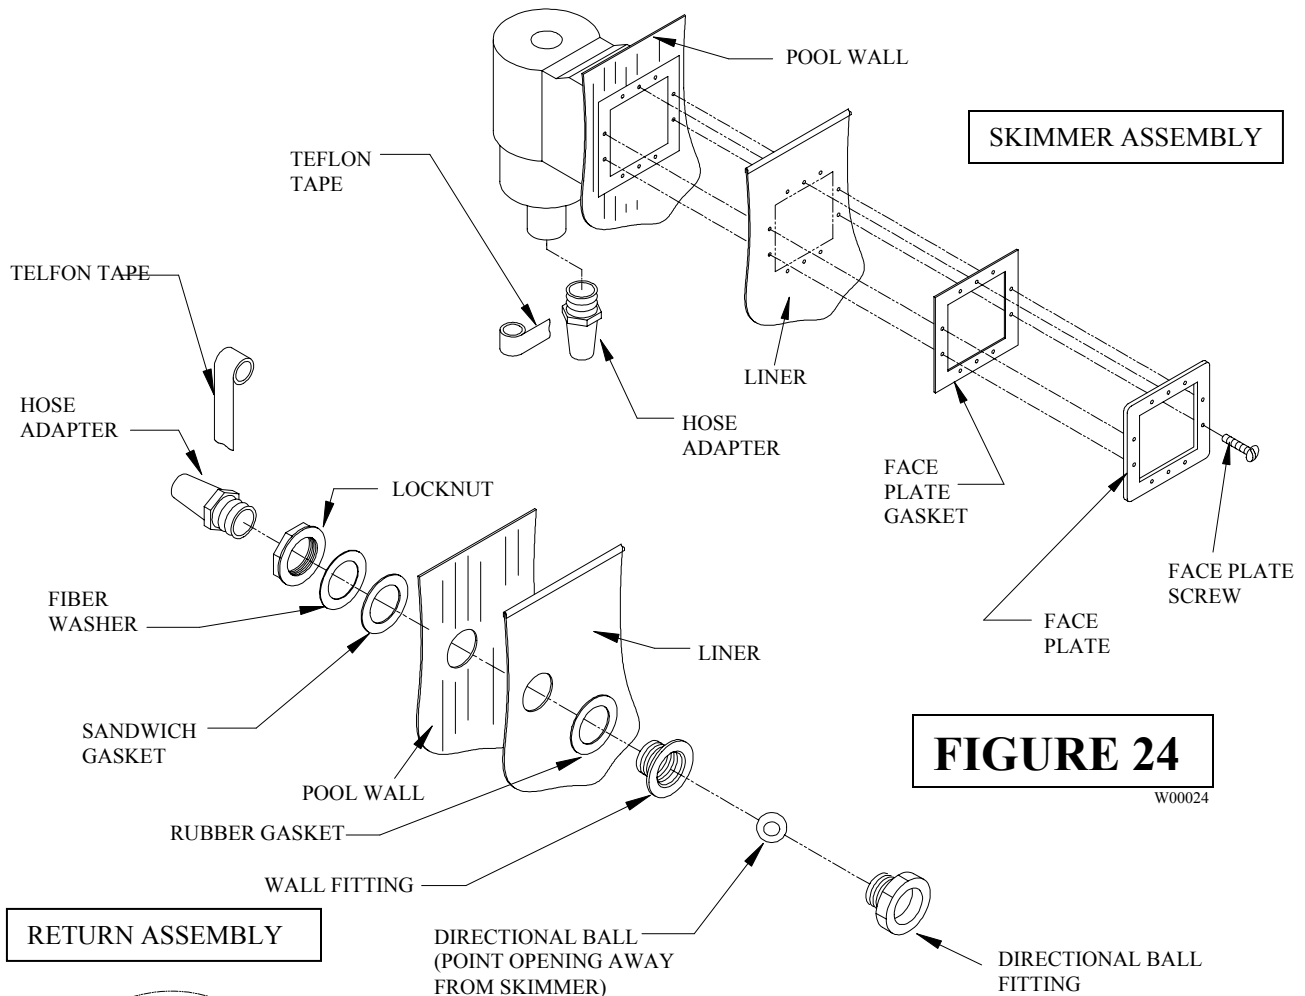


FIGURE 24



W00024

FIGURE 25

SA00003B SA00004 SA00005



Note: Refer to Page 2, Warning section for Label Number Designations

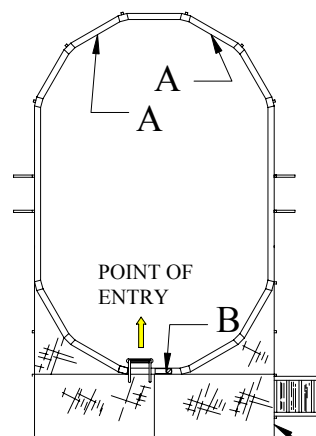

WARNING: After completion of the pool, the pool must never be drained to less than 1 1/2 full. Damage to the structure and/or liner may result.

